


8 Port Gigabit Industrial POE Switch

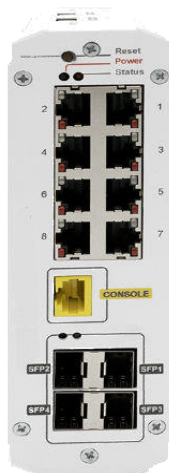

Functions

- 8 POE Port 10/100/1000 Mbp
- 2 Port SFP Uplink (Up to 4 Port SFP)
- 2 Port Gigabit Uplink
- Layer 2 Managment
- SNMP Support
- POE Support up to 150M
- 400 watt Power Supply
- 24Gb Bandwidth
- Fanless
- Rackmount
- -45°C ~ +75°C

MODEL	MNA-SW884G-PSI
-------	----------------

Interfaces

Total Port 12 Ports	Total Port 12 Ports (8 POE + 4 Uplink)
Max POE Output	Max POE Output 400 Watt up to 600 Watt
POE Port Control Texas Instruments Chipset	
Gigabit RJ45 POE Port	8 Port (Port 1- 2 up to 90W / Port 3-8 Up To 30Watt Per Port)
Gigabit Uplink Port	2 * SFP + 2 * Gigabit Uplink - (Up to 4 Port SFP)
SNMP	Support

Network Performance

Standard	IEEE802.3x, IEEE802.3u, IEEE802.3az, IEEE802.3ab, IEEE802.3af, IEEE802.3at(Up to 30Watt
Protocols	CSMA/CD , Recovery Network
Speed & Cabling	Ethernet 10Mbps (half duplex), 20Mbps (full duplex); 10BASE-T: 14,880bps/port Fast Ethernet 100Mbps (half duplex), 200Mbps (full duplex); 100BASE-TX:14,880bps/port Gigabit Ethernet 1000Mbps (half duplex), 2000Mbps (full duplex); 1000BASE-TX: 1488000bps/port Cabling 10Base-TX:Cat 3 or above Cat.5 UTP(100m) POE=200M 100Base-TX:Cat 5 UTP(100m) POE=150M 1000Base-TX:Cat 6e UTP or Cat 6 UTP(120m) POE=150

Bandwidth	24Gb Internal Bandwidth
MAC Table	64Kb
Auto MDI-MDIX	Yes All Ports
Console	Yes - Web & RS232 Layer2+ Management (Telnet Support)
Security	Port Security, Access IP List, SSH & HTTPS Login, IEE 802.1 X / Radius Server Authentcaton

Hardware

Processore Type	Realtek
LED Panel	POE Activity / Data Activity

PD`S

IP Camera & IP Phone	Yes
----------------------	-----

General

Dimension	155*145*54mm
Weight	850 gr
Storage Temp	-45°C ~ +75°C / 10% ~ 90% RH
Operation Temp	-40°C ~ +70°C / 10% ~ 90% RH
Power	2 * 48 DC - 2.9A (Redundent)
MTBF	100K hrs min. MIL-HDBK-217F (25°)
Rackmount	Din Rail
Radiation Electromagnetic	EN55016